

LED FLOOD LIGHT

SL-Q Series



PIR SENSOR

Product Features:



Voltage: AC220-240V 50Hz

Linear (DOB) Drive



AVAILABLE WITH
PIR SENSOR



Model	Wattage	Lumen	CRI	Size	Material
SL-Q10W-P	10W	750 lm	≥ 80	128×114×52mm	Aluminum + Glass
SL-Q20W-P	20W	1500 lm	≥ 80	148×131×53mm	Aluminum + Glass
SL-Q30W-P	30W	2100 lm	≥ 80	167×148×57mm	Aluminum + Glass
SL-Q50W-P	50W	3500 lm	≥ 80	188×166.8×56.3mm	Aluminum + Glass

MICROWAVE SENSOR

Product Features:



Voltage: AC220-240V 50Hz

Linear (DOB) Drive



AVAILABLE WITH
MICROWAVE SENSOR




Model	Wattage	Lumen	CRI	Size	Material
SL-Q10W-M	10W	750 lm	≥80	128×114×52mm	Aluminum + Glass
SL-Q20W-M	20W	1500 lm	≥80	148×131×53mm	Aluminum + Glass
SL-Q30W-M	30W	2100 lm	≥80	167×148×57mm	Aluminum + Glass
SL-Q50W-M	50W	3500 lm	≥80	188×166.8×56.3mm	Aluminum + Glass

Product Features:




Voltage: AC220-240V 50Hz

Linear (DOB) Drive

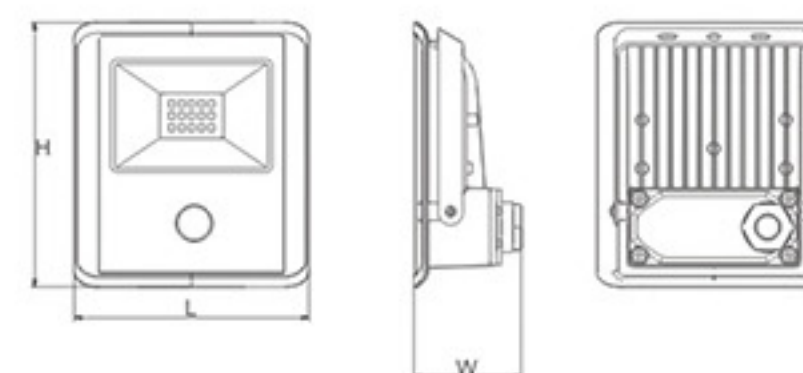

Model	Wattage	Lumen	CRI	Size	Material
SL-Q10W	10W	750 lm	≥80	128×114×52mm	Aluminum + Glass
SL-Q20W	20W	1500 lm	≥80	148×131×53mm	Aluminum + Glass
SL-Q30W	30W	2100 lm	≥80	167×148×57mm	Aluminum + Glass
SL-Q50W	50W	3500 lm	≥80	188×166.8×56.3mm	Aluminum + Glass

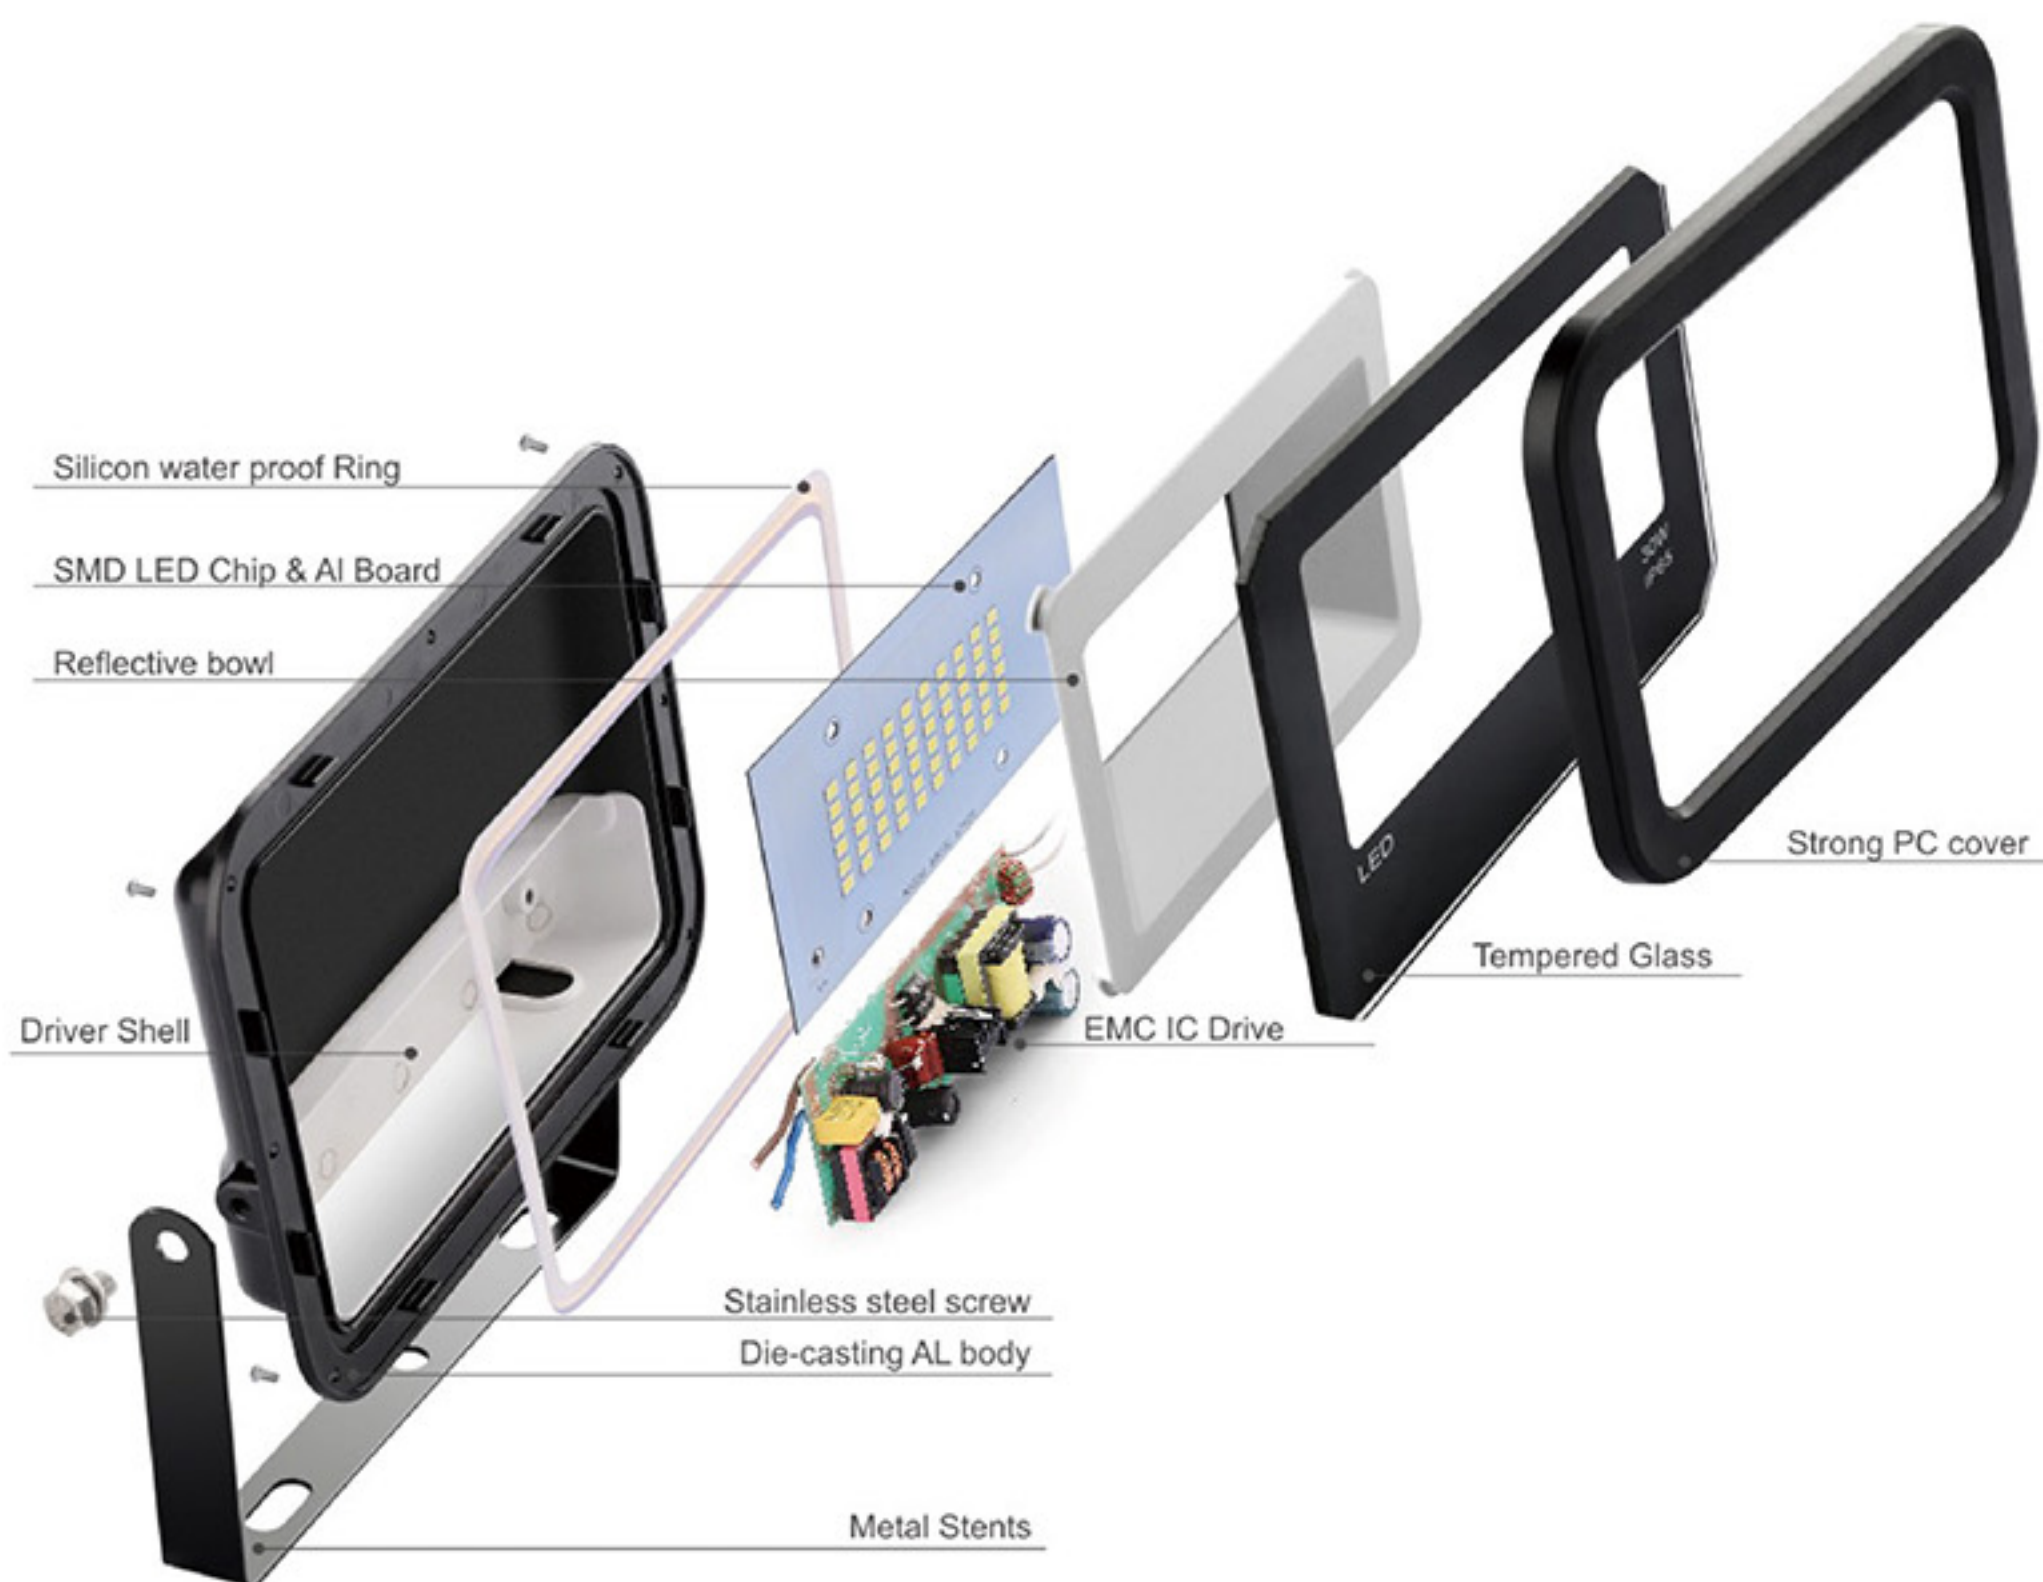


Product Features:



Voltage: AC 85-265V 50Hz

Constant Current Ic Drive

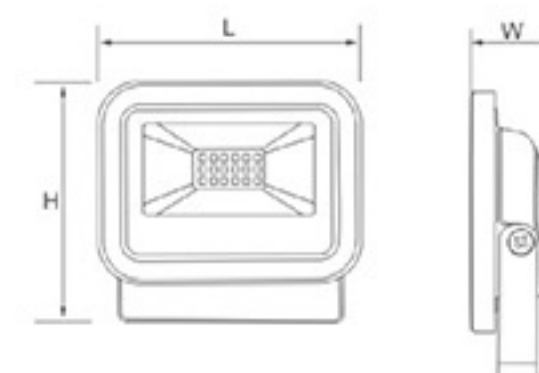

Model	Wattage	Lumen	CRI	Size	Material
SL-AFLAP10W	10W	800 lm	≥ 80	128×114×52mm	Aluminum PC + Glass
SL-AFLAP20W	20W	1600 lm	≥ 80	148×131×53mm	Aluminum PC + Glass
SL-AFLAP30W	30W	2400 lm	≥ 80	167×148×57mm	Aluminum PC + Glass
SL-AFLAP50W	50W	4000 lm	≥ 80	188×166.8×56.3mm	Aluminum PC + Glass
SL-AFLAP100W	100W	8000 lm	≥ 80	310×240×44mm	Aluminum PC + Glass





Product Features:



Voltage: AC 110-130V 50/60Hz
AC 220-240V 50/60Hz

Constant Current Ic Drive

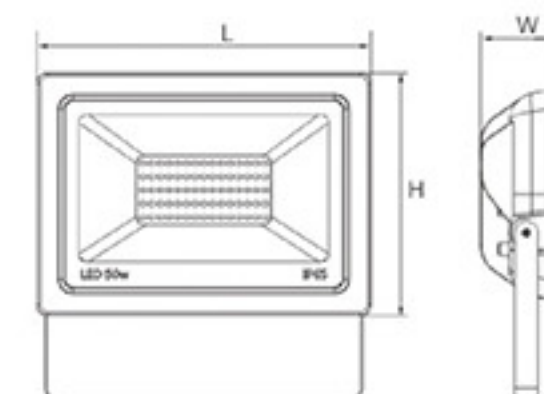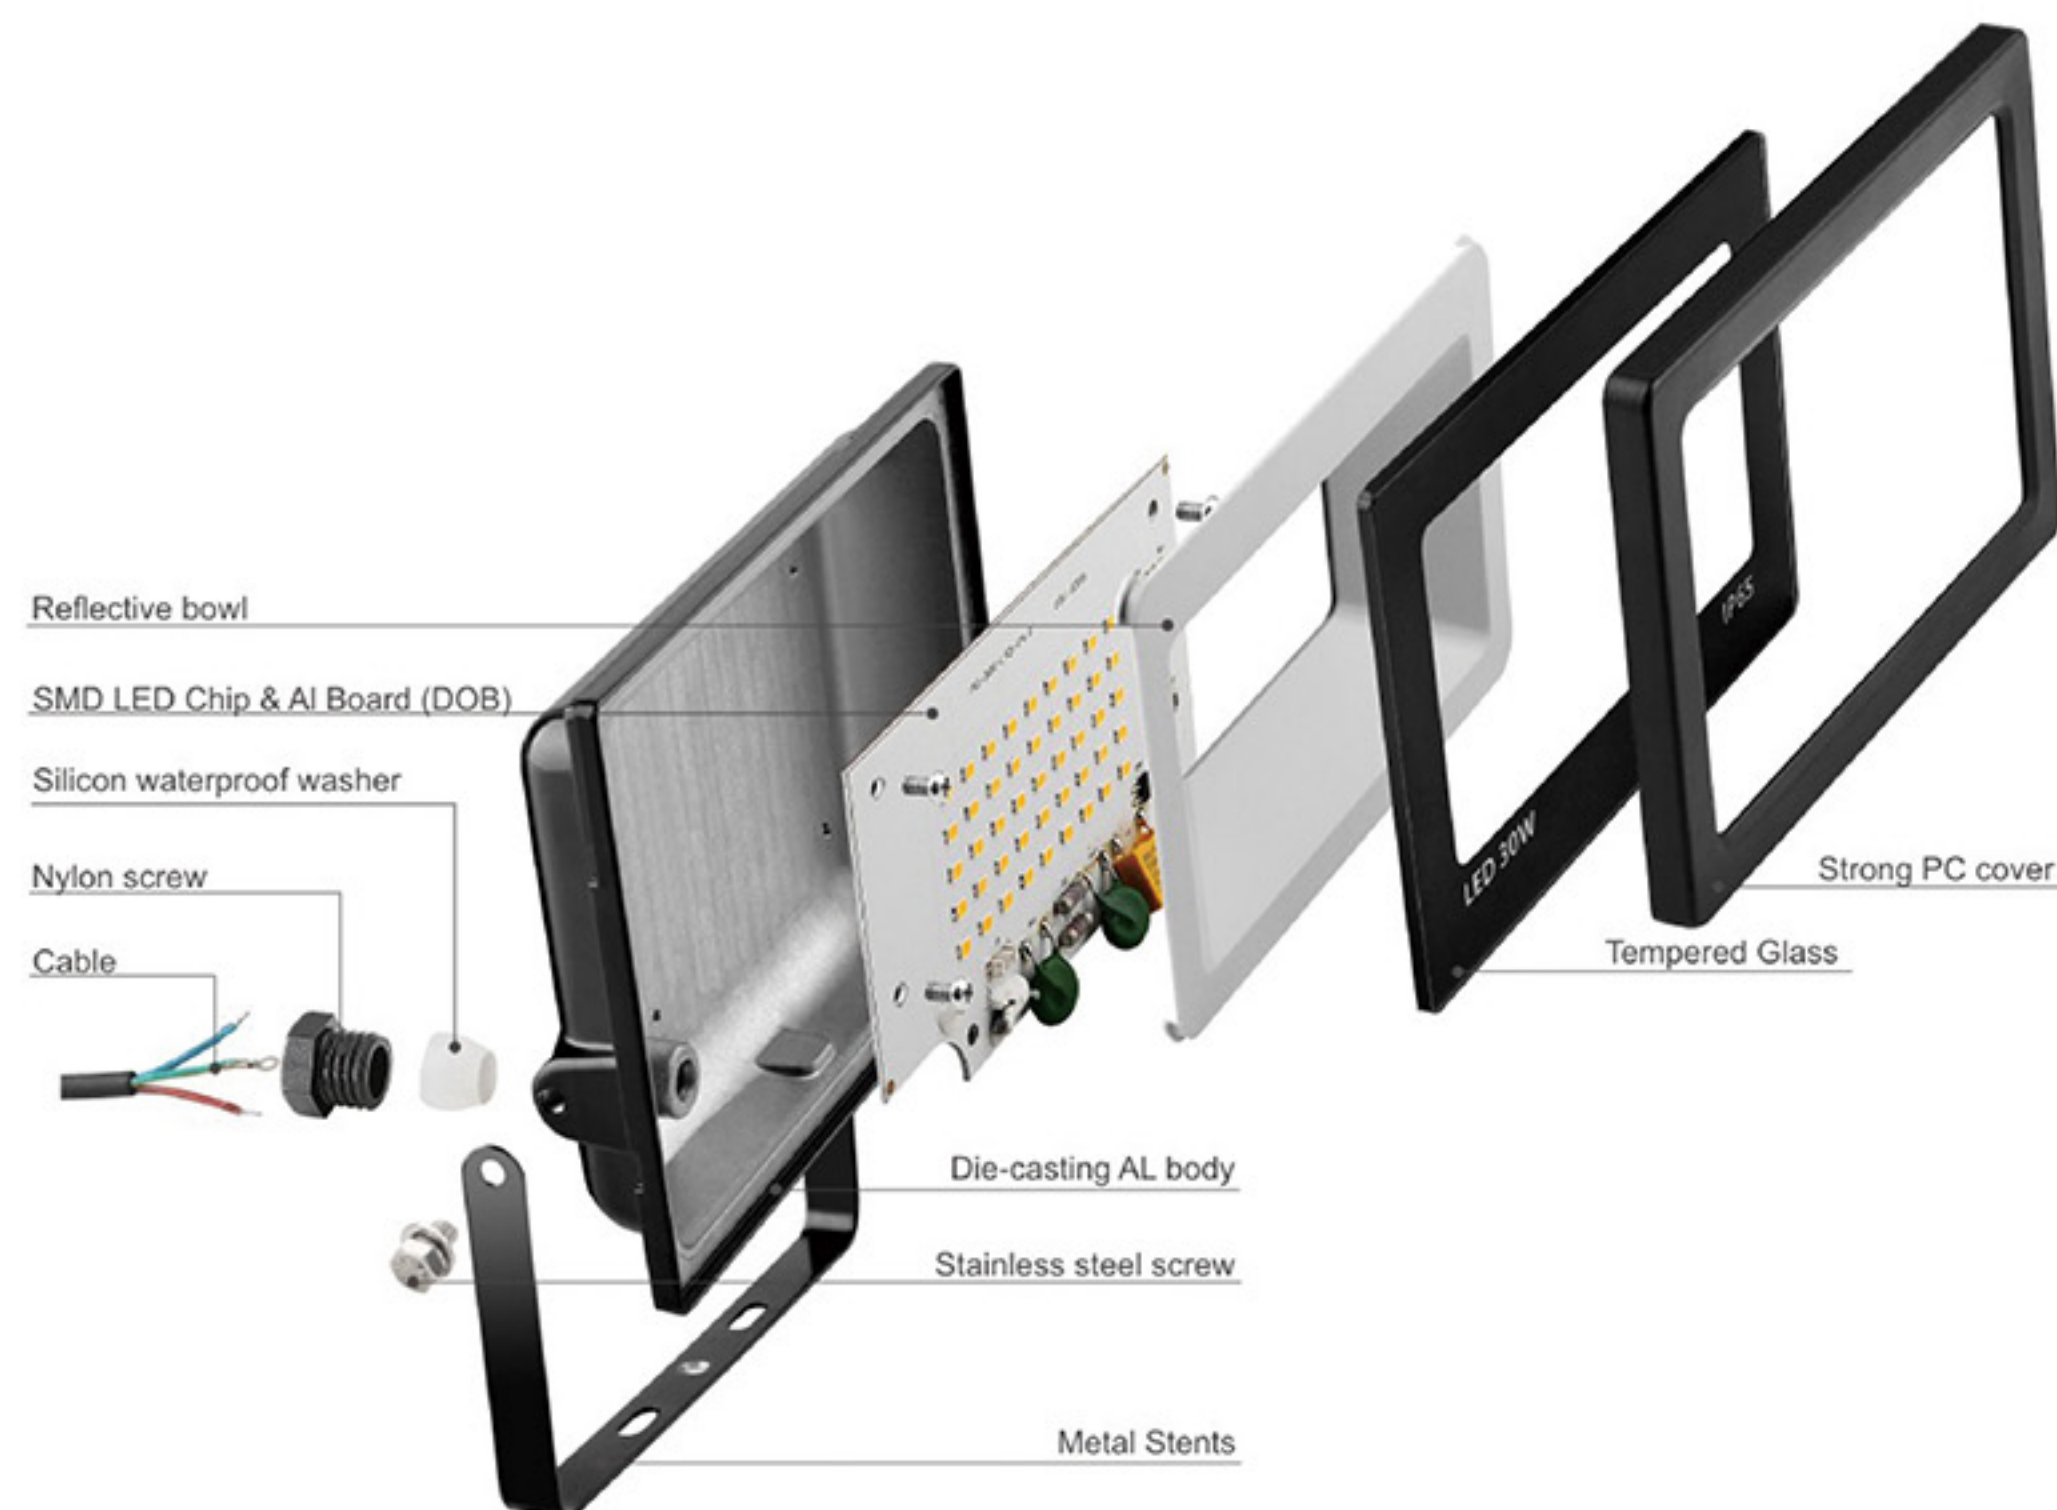

Model	Wattage	Lumen	CRI	Size	Material
SL-BFLAL10W	10W	750 lm	≥80	105×77×28mm	Aluminum PC + Glass
SL-BFLAL20W	20W	1500 lm	≥80	134×98×34mm	Aluminum PC + Glass
SL-BFLAL30W	30W	2100 lm	≥80	173×126×37mm	Aluminum PC + Glass
SL-BFLAL50W	50W	3500 lm	≥80	173×126×45mm	Aluminum PC + Glass
SL-BFLAL80W	80W	5600 lm	≥80	260×189×50mm	Aluminum PC + Glass
SL-BFLAL100W	100W	7000 lm	≥80	260×189×50mm	Aluminum PC + Glass


SL-AFLAP-P Series

Product Features:



Voltage: AC 85-265V 50/60Hz

Constant Current Ic Drive

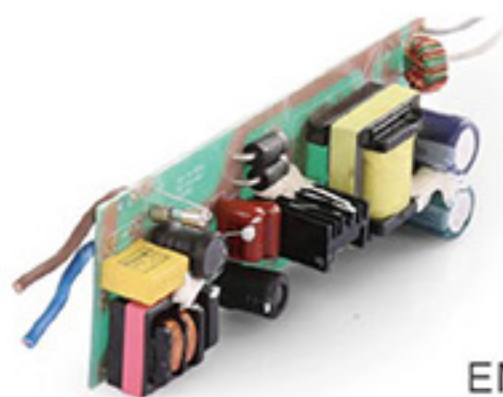

EMC



Model	Wattage	Lumen	CRI	Size	Material
SL-AFLAP10W-P	10W	800 lm	≥80	124×165×63mm	Aluminum PC + Glass
SL-AFLAP20W-P	20W	1600 lm	≥80	153×187×63mm	Aluminum PC + Glass
SL-AFLAP30W-P	30W	2400 lm	≥80	185×209×63mm	Aluminum PC + Glass
SL-AFLAP50W-P	50W	4000 lm	≥80	232×245×63mm	Aluminum PC + Glass
SL-AFLAP100W-P	100W	8000 lm	≥80	314×240×63mm	Aluminum PC + Glass

SL-BFLAL-P Series

Product Features:



Voltage: AC 110-130V 50/60Hz
AC 220-240V 50/60Hz

Linear Drive




Model	Wattage	Lumen	CRI	Size	Material
SL-BFLAL10W-P	10W	700 lm	≥80	136×105×50mm	Aluminum PC + Glass
SL-BFLAL20W-P	20W	1400 lm	≥80	156×134×56mm	Aluminum PC + Glass
SL-BFLAL30W-P	30W	2100 lm	≥80	182×173×60mm	Aluminum PC + Glass
SL-BFLAL50W-P	50W	3500 lm	≥80	182×173×60mm	Aluminum PC + Glass
SL-BFLAL80W-P	80W	5600 lm	≥80	262×240×71mm	Aluminum PC + Glass
SL-BFLAL100W-P	100W	7000 lm	≥80	262×240×71mm	Aluminum PC + Glass




LED FLOOD LIGHT

SL-EFLAL Series

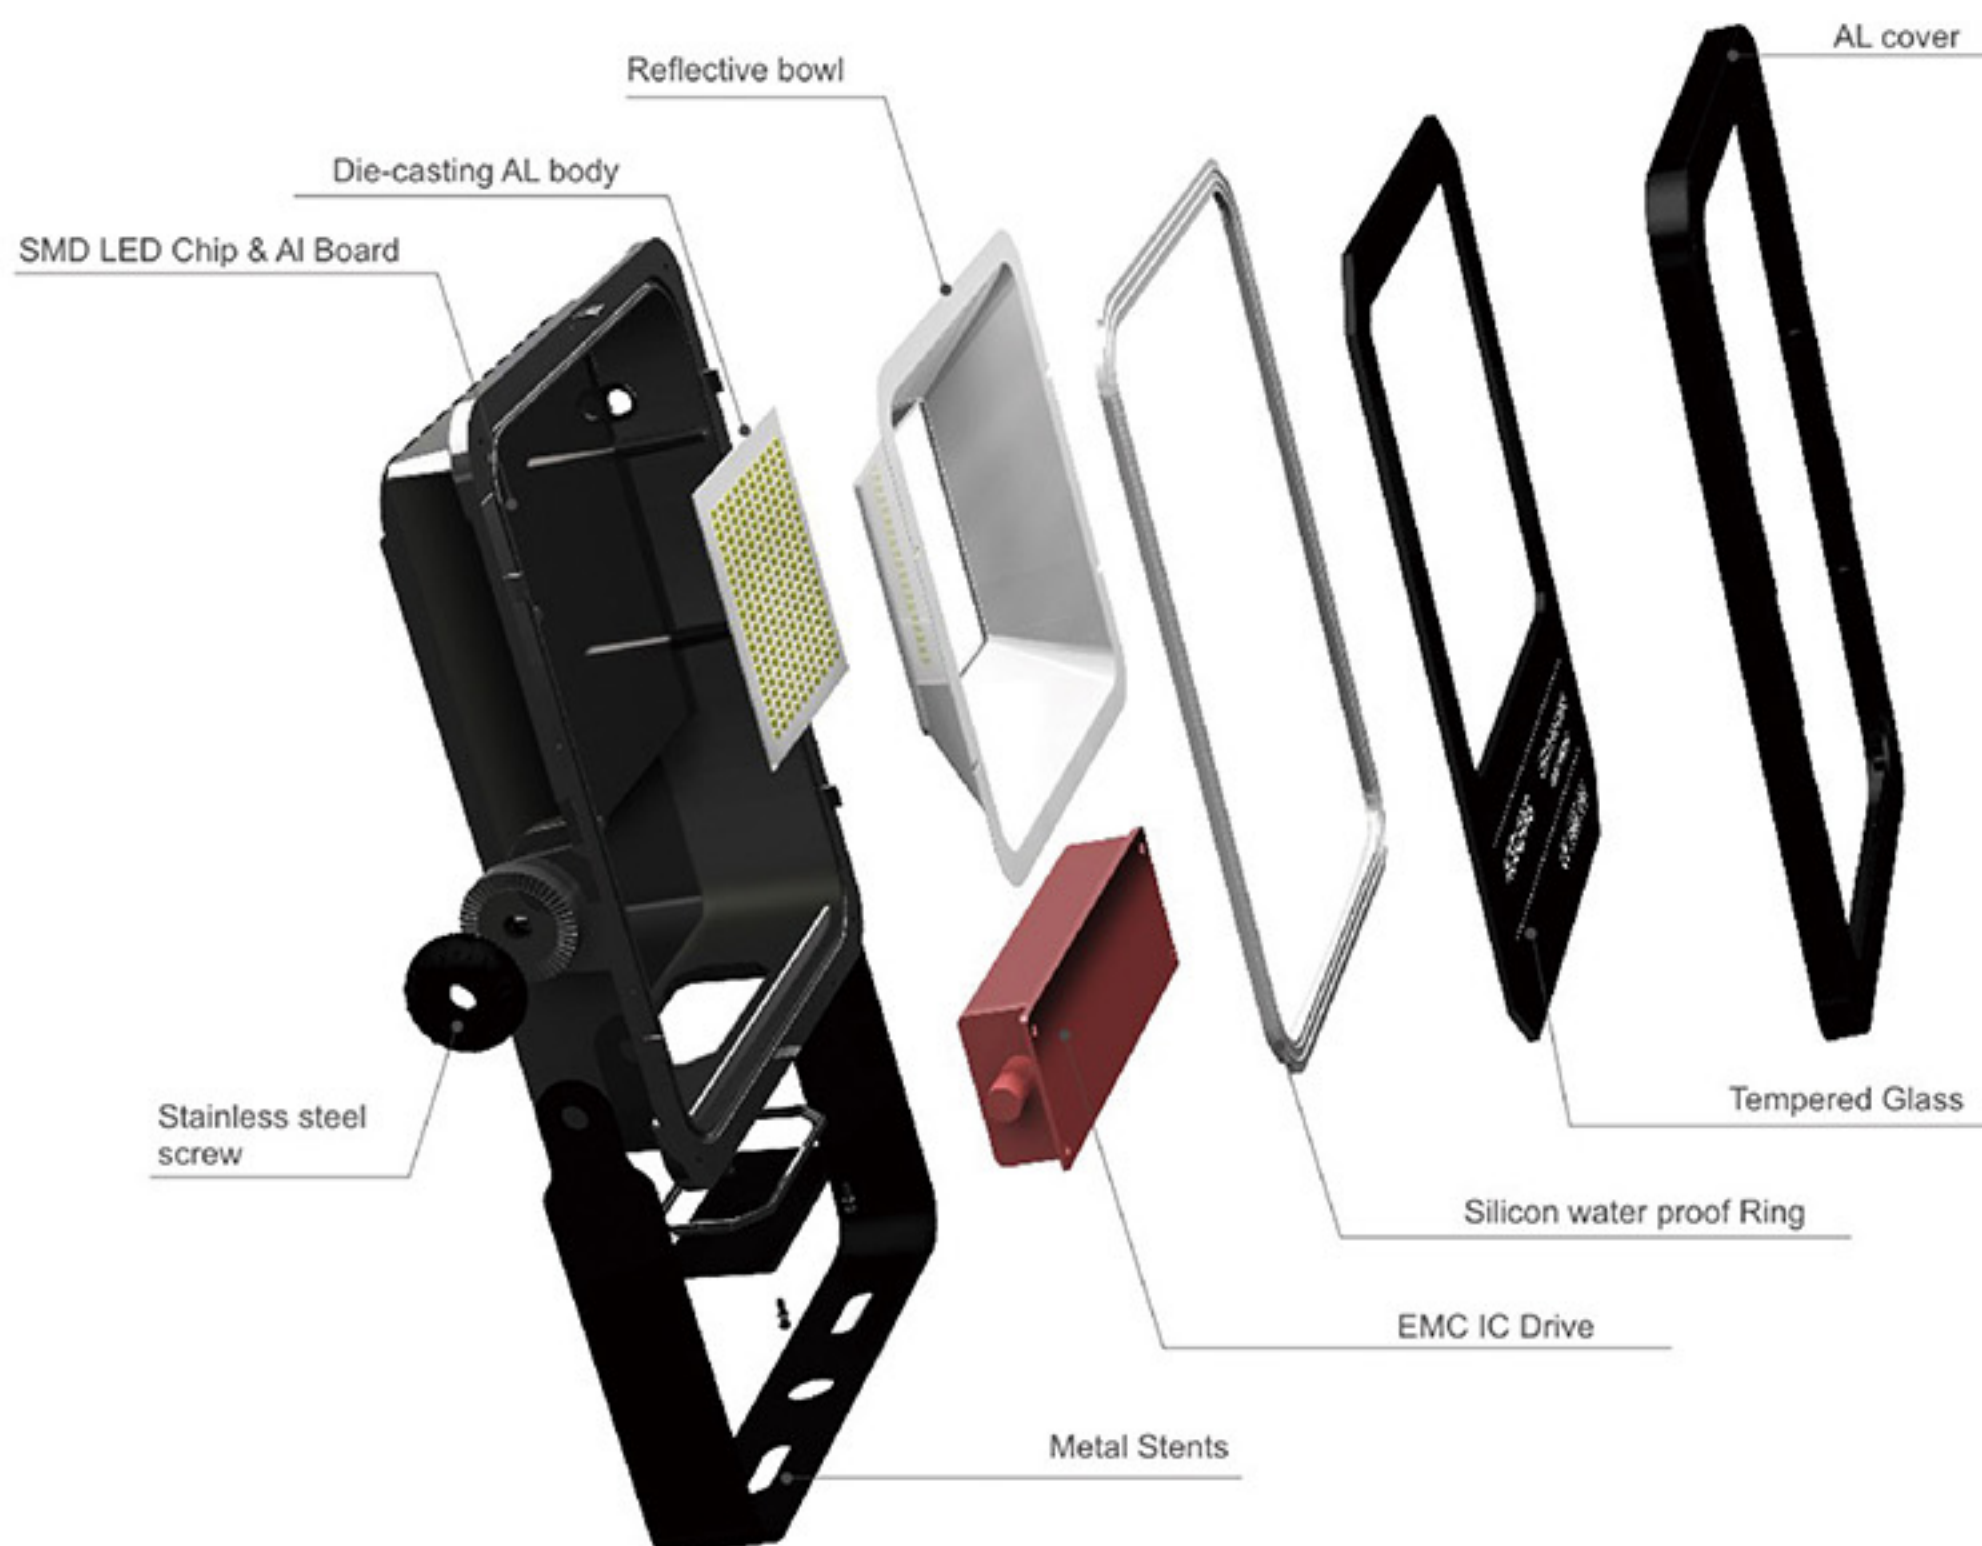

IP65

2018 New Design!

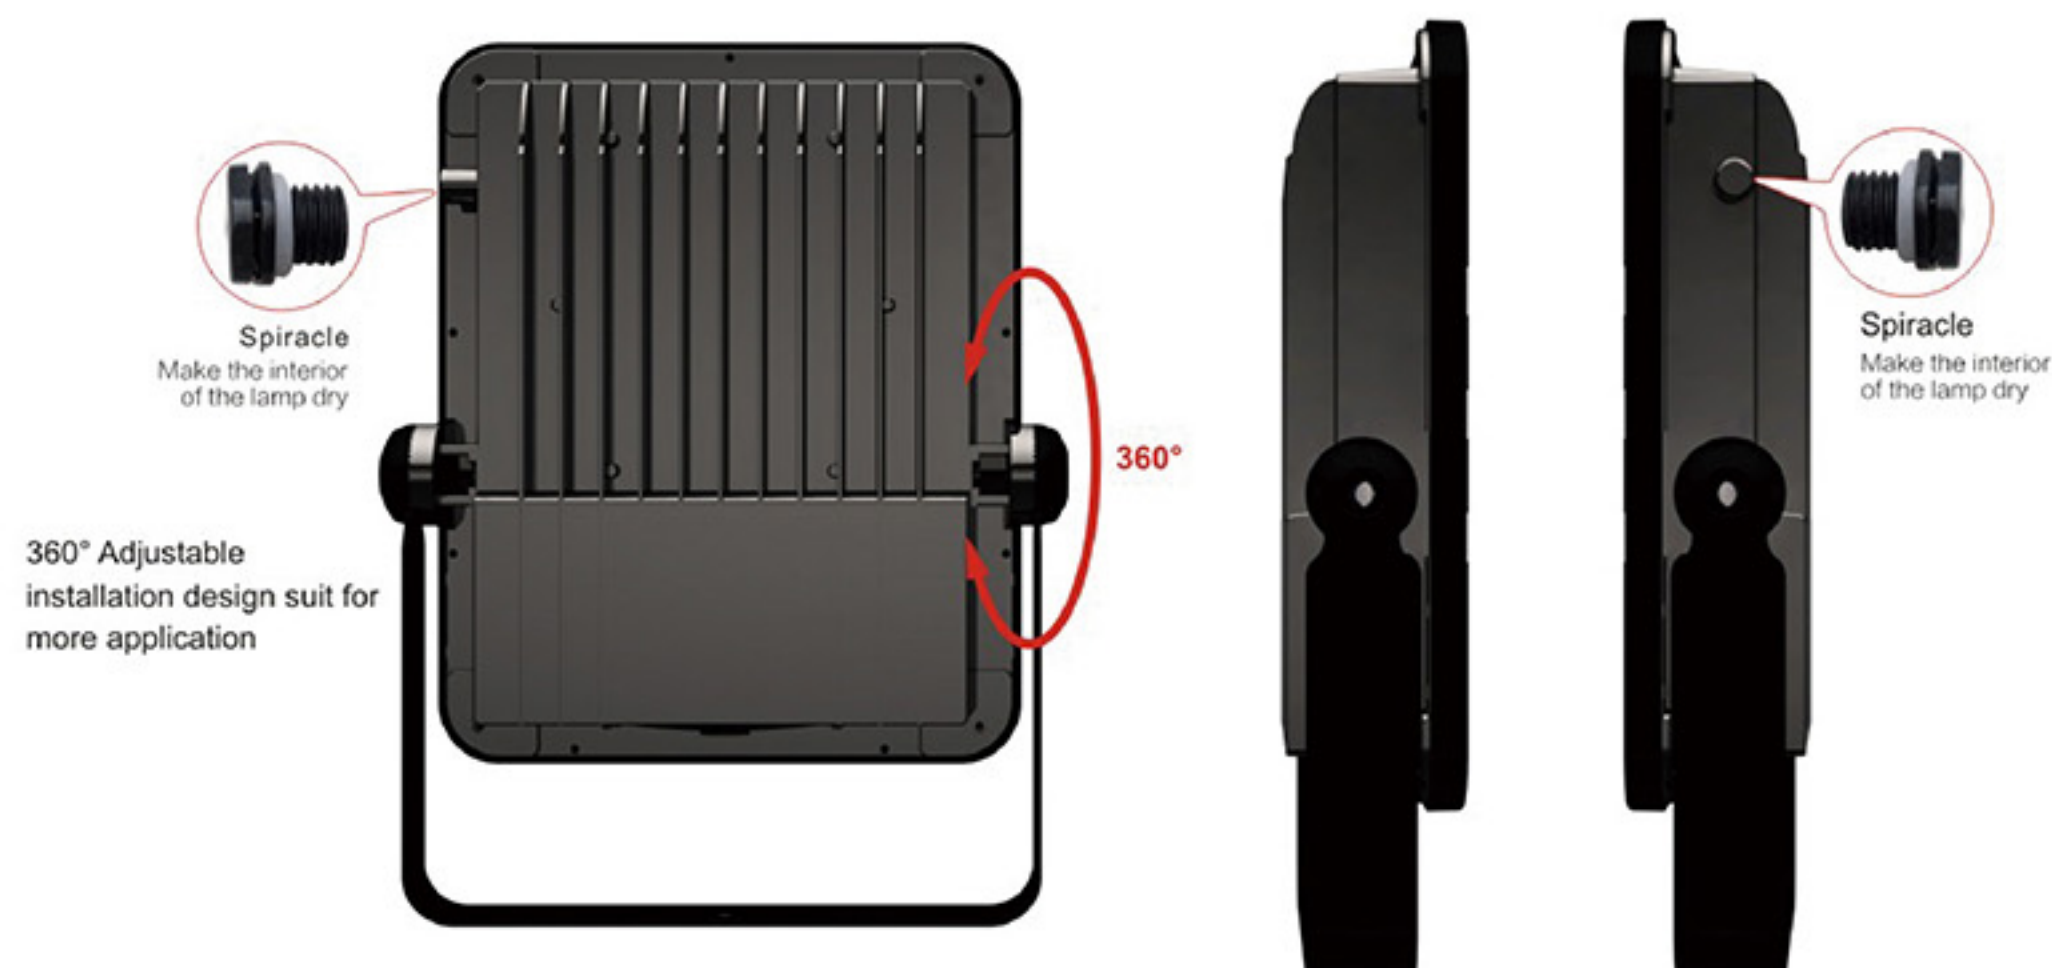

Meanwell Isolation drive for 100 150 200 250W


SL-EFLAL Series

Product Features:



Voltage: AC 100-240V 50Hz

Constant Current Ic Drive

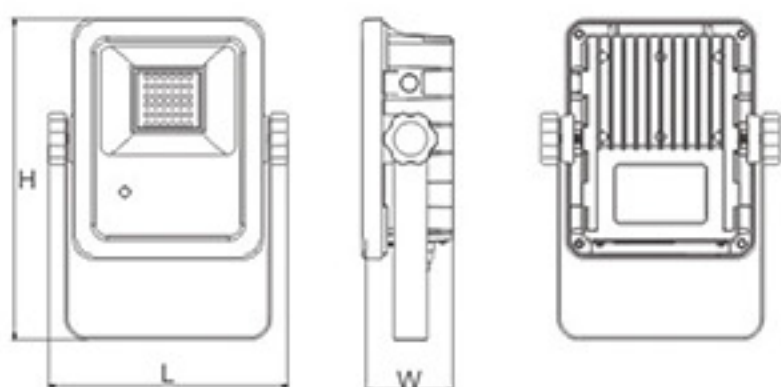

120Lm/W

High light efficiency!



CE RoHS IP65

Model	Wattage	Lumen	CRI	Size	Material
SL-EFLAL16W	16W	1920 lm	≥80	190×140×55mm	Aluminum + Glass
SL-EFLAL30W	30W	3600 lm	≥80	240×176×65mm	Aluminum + Glass
SL-EFLAL50W	50W	6000 lm	≥80	300×230×68mm	Aluminum + Glass
SL-EFLAL70W	70W	8400 lm	≥80	300×230×68mm	Aluminum + Glass
SL-EFLAL100W	100W	12000 lm	≥80	395×310×80mm	Aluminum + Glass
SL-EFLAL130W	130W	15600 lm	≥80	395×310×80mm	Aluminum + Glass
SL-EFLAL200W	200W	24000 lm	≥80	570×420×110mm	Aluminum + Glass
SL-EFLAL250W	250W	30000 lm	≥80	570×420×110mm	Aluminum + Glass

SL-DFLAP Series

Product Features:



Voltage: AC 220V 50/60Hz

Linear Drive

CE RoHS IP65



Model	Wattage	Lumen	CRI	Size	Material
SL-DFLAP35W-A	35W	2800 lm	≥80	195.1×180×43.8mm	Aluminum + PC
SL-DFLAP50W-A	50W	4000 lm	≥80	195.1×180×43.8mm	Aluminum + PC

SL-DFLAP Series

Product Features:



Voltage: AC 220V 50/60Hz

Linear Drive

CE RoHS IP65



Model	Wattage	Lumen	CRI	Size	Material
SL-DFLAP35W-B	35W	2800 lm	≥80	278.4×166.7×61.4mm	Aluminum + PC
SL-DFLAP50W-B	50W	4000 lm	≥80	278.4×166.7×61.4mm	Aluminum + PC

HOLDER Series

Product Features:



Voltage:AC 85-265V 50Hz
Constant Current Ic Drive

SL-AFLAP10W-S
SL-AFLAP20W-S
SL-AFLAP30W-S
SL-AFLAP50W-S
SL-AFLAP100W-S



Voltage:AC 220-240V 50/60Hz
Linear Drive

SL-BFLAL10W-S
SL-BFLAL20W-S
SL-BFLAL30W-S
SL-BFLAL50W-S
SL-BFLA80W-S
SL-BFLAL100W-S



Product Features:



Voltage:AC 85-265V 50Hz
Constant Current Ic Drive

SL-AFLAP10W-H
SL-AFLAP20W-H
SL-AFLAP30W-H
SL-AFLAP50W-H
SL-AFLAP100W-H



Voltage:AC 220-240V 50/60Hz
Linear Drive

SL-BFLAL10W-H
SL-BFLAL20W-H
SL-BFLAL30W-H
SL-BFLAL50W-H
SL-BFLA80W-H
SL-BFLAL100W-H



HOLDER Series

Product Features:



Voltage: AC 85-265V 50Hz
Constant Current Ic Drive

SL-AFLAP10W-F
SL-AFLAP20W-F
SL-AFLAP30W-F
SL-AFLAP50W-F
SL-AFLAP100W-F



Product Features:



Voltage: AC 85-265V 50Hz
Constant Current Ic Drive

SL-AFLAP10W-L
SL-AFLAP20W-L
SL-AFLAP30W-L
SL-AFLAP50W-L
SL-AFLAP100W-L



Voltage: AC 220-240V 50/60Hz
Linear Drive

SL-BFLAL10W-F
SL-BFLAL20W-F
SL-BFLAL30W-F
SL-BFLAL50W-F
SL-BFLA80W-F
SL-BFLAL100W-F



Voltage: AC 220-240V 50/60Hz
Linear Drive

SL-BFLAL10W-L
SL-BFLAL20W-L
SL-BFLAL30W-L
SL-BFLAL50W-L
SL-BFLA80W-L
SL-BFLAL100W-L